INSTALLATION INSTRUCTION OF BACK FLAP – TOURING



WARNING!

You will need extra to adapt the back flap yourself:


- Driller
- Drill 6mm and 11mm
- Riveter to river nuts


You will need to exchange it:

- Allen wrench 4mm, 6mm
- Wrench 10mm and 13mm


ASSEMBLY INSTRUCTIONS FOR THE BACK FLAP CLOSER (STEP 2 - 4)

STEP 1

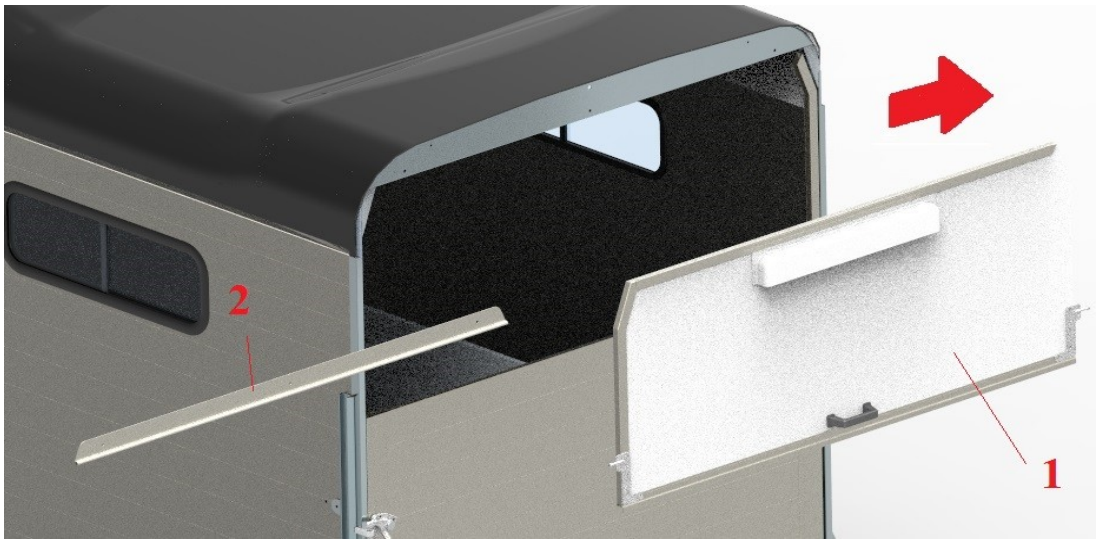


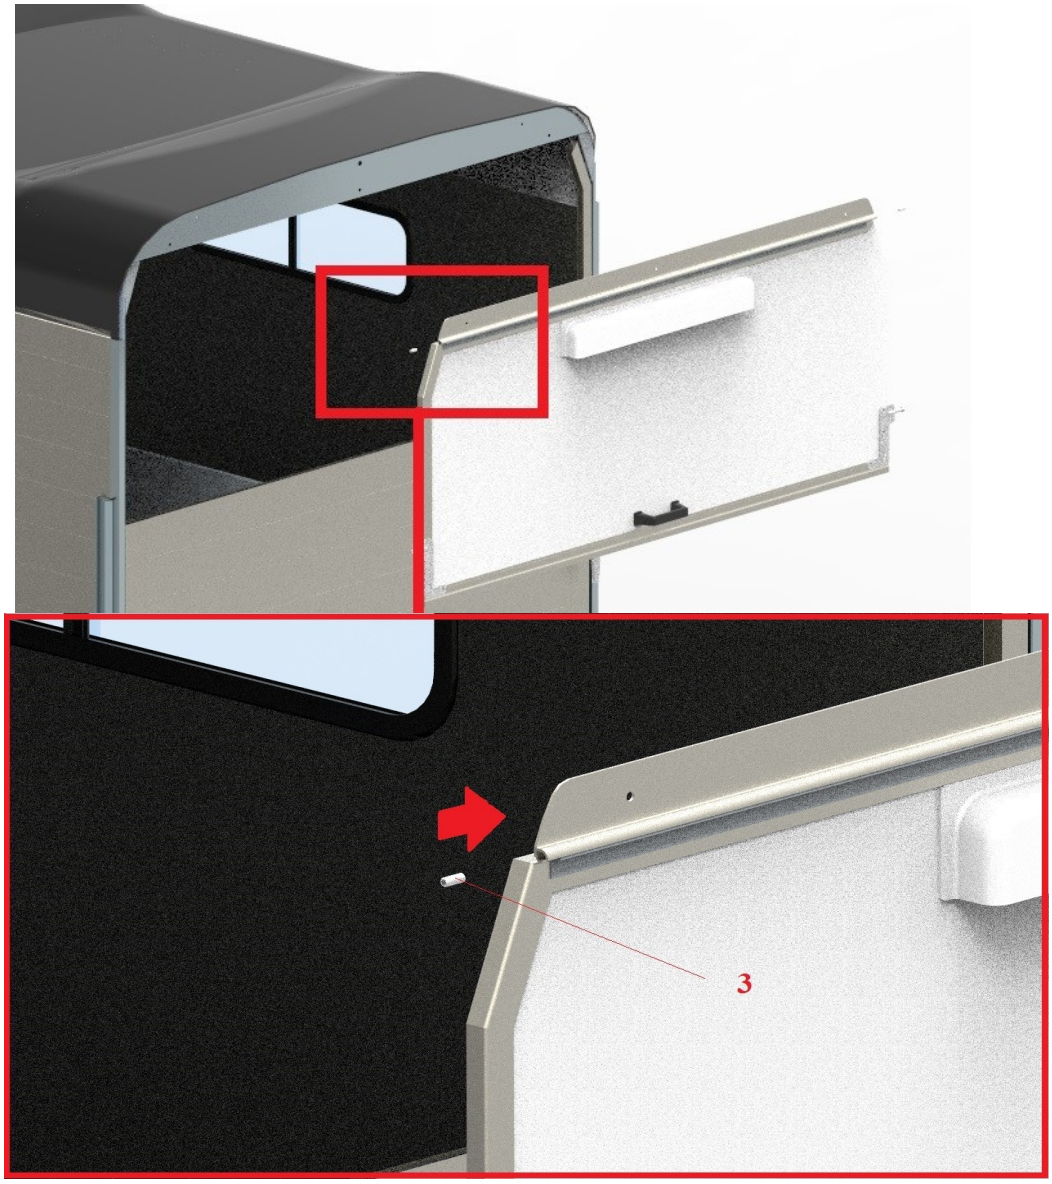

PLEASE INSTALL THE FLAP IN CENTER!

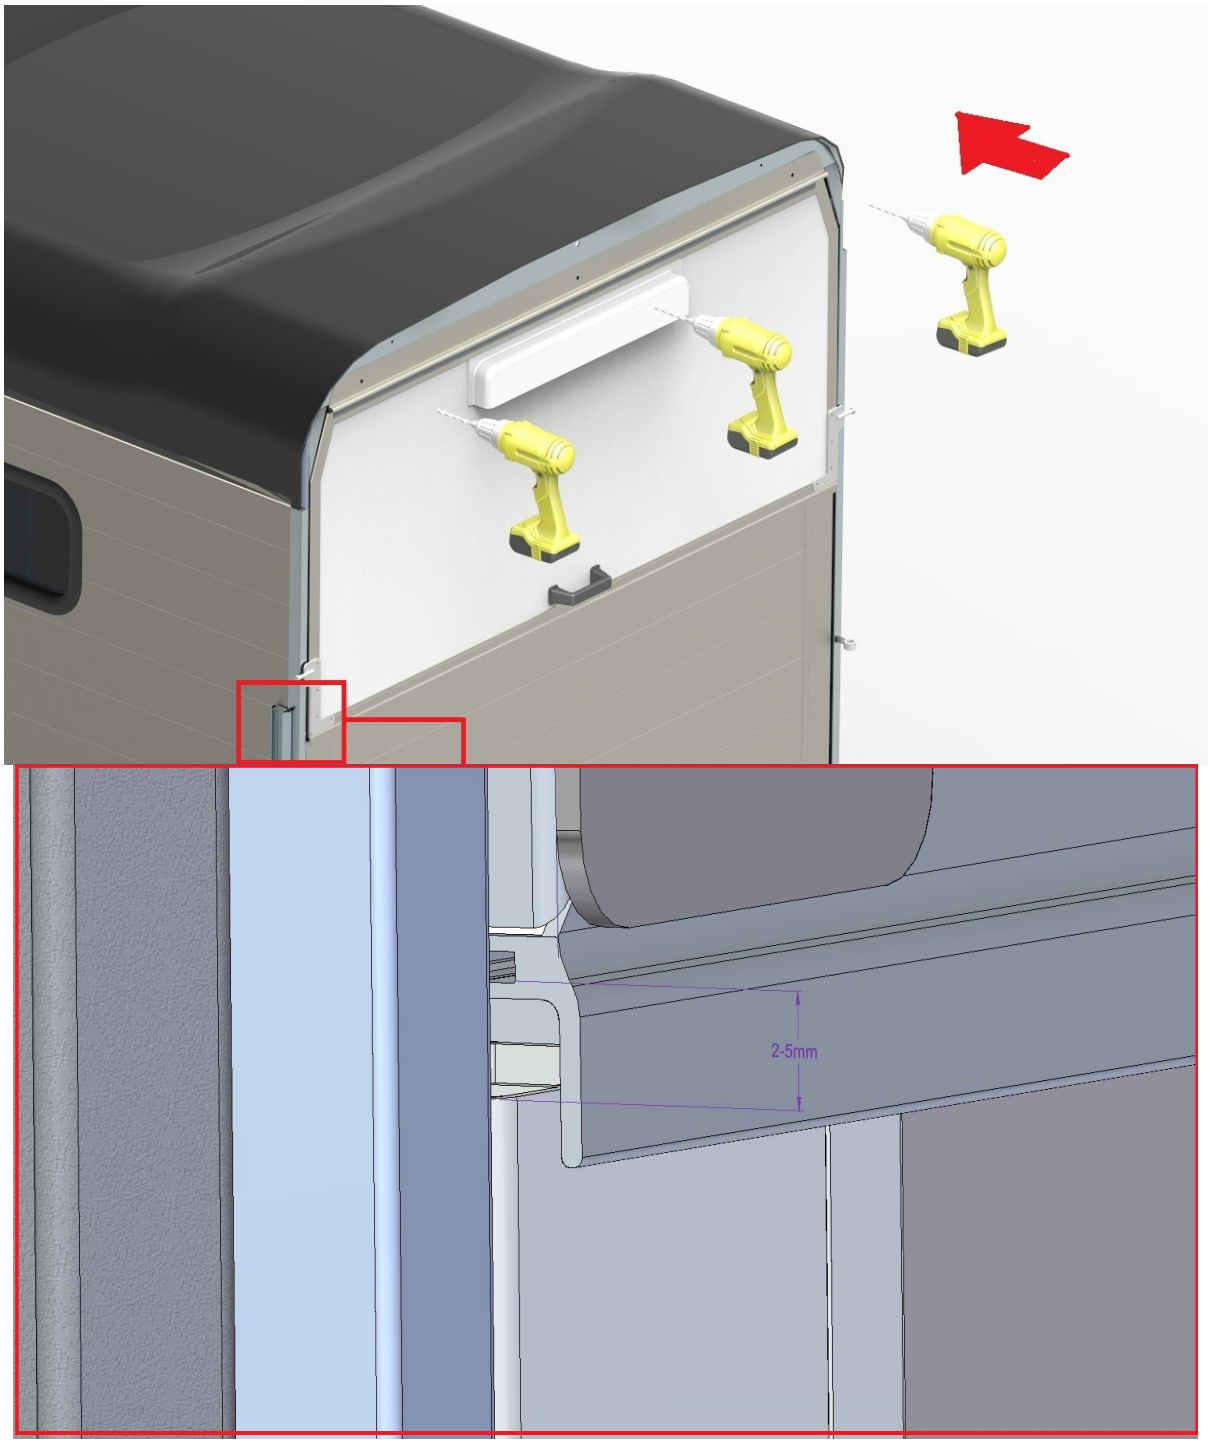





NUMBER	PICTURE	PCS
1		1
2		1
3		2
4		3
5	 8x30mm	3

CORRECT INSTALLATION




STEP 2

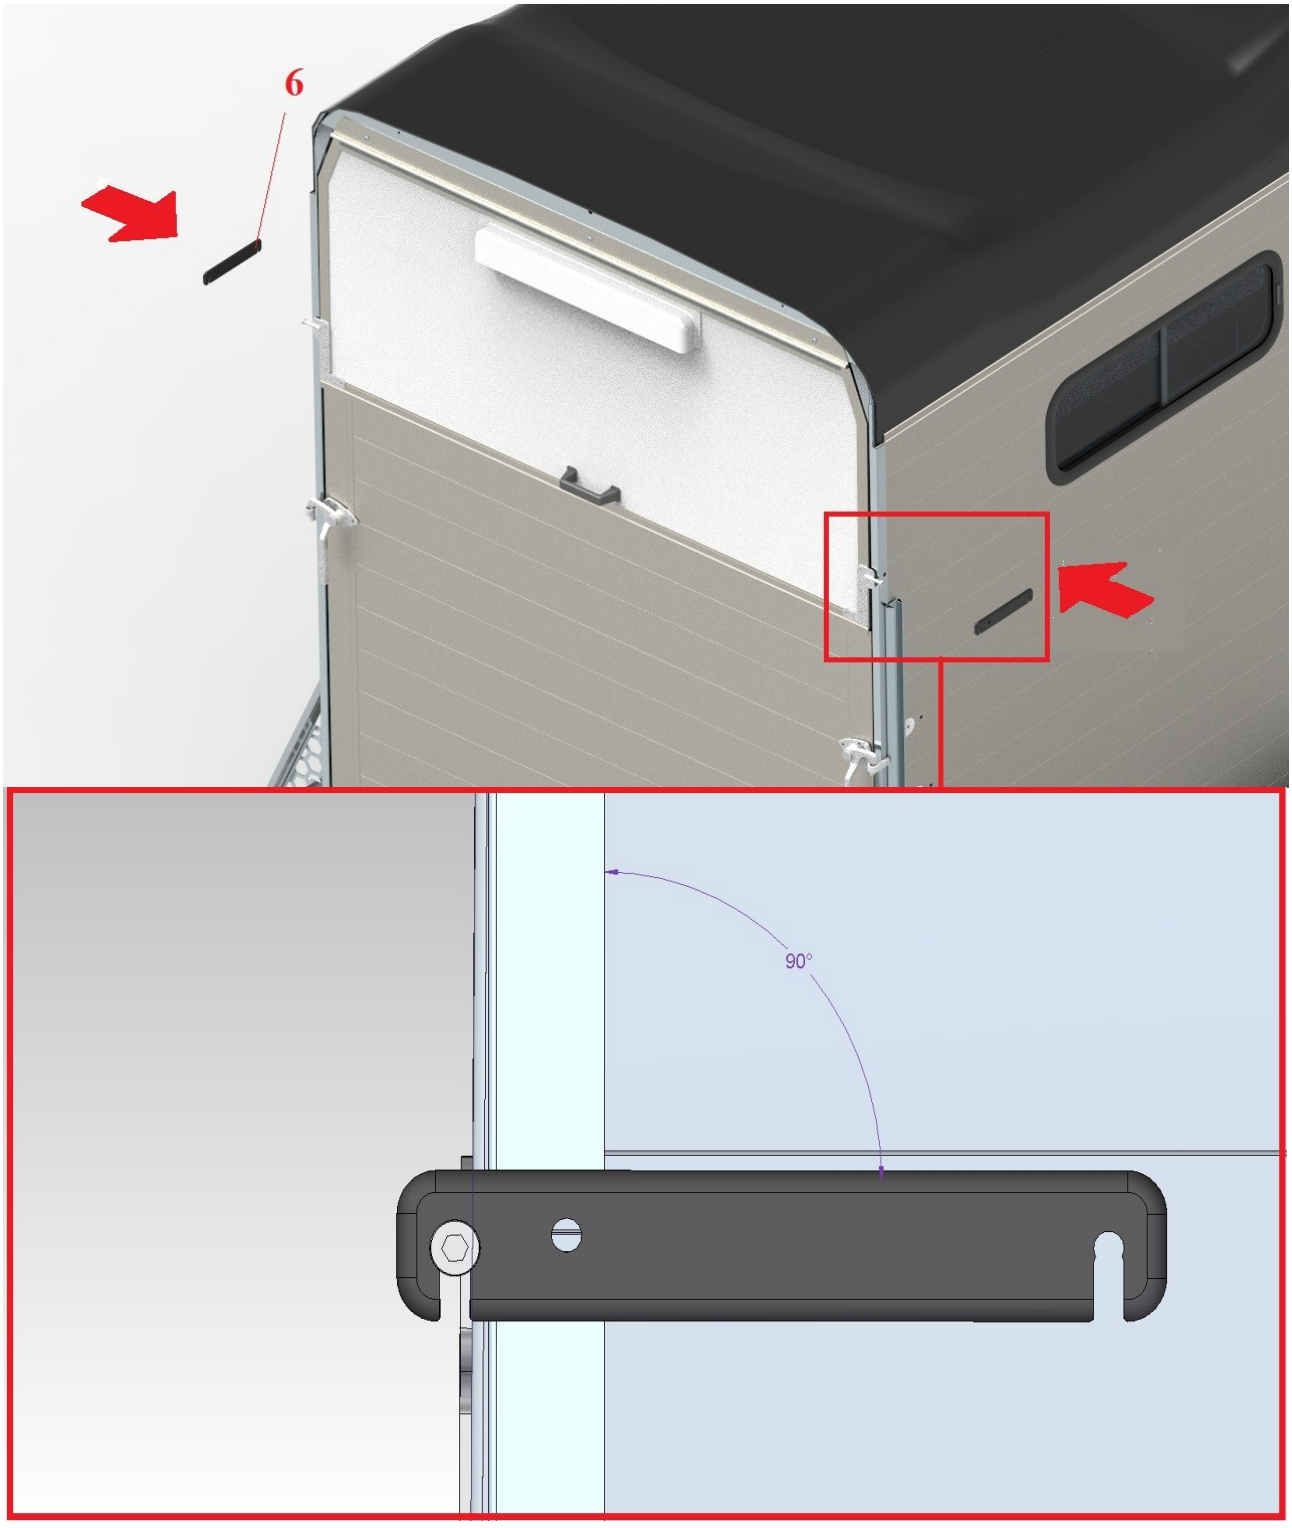

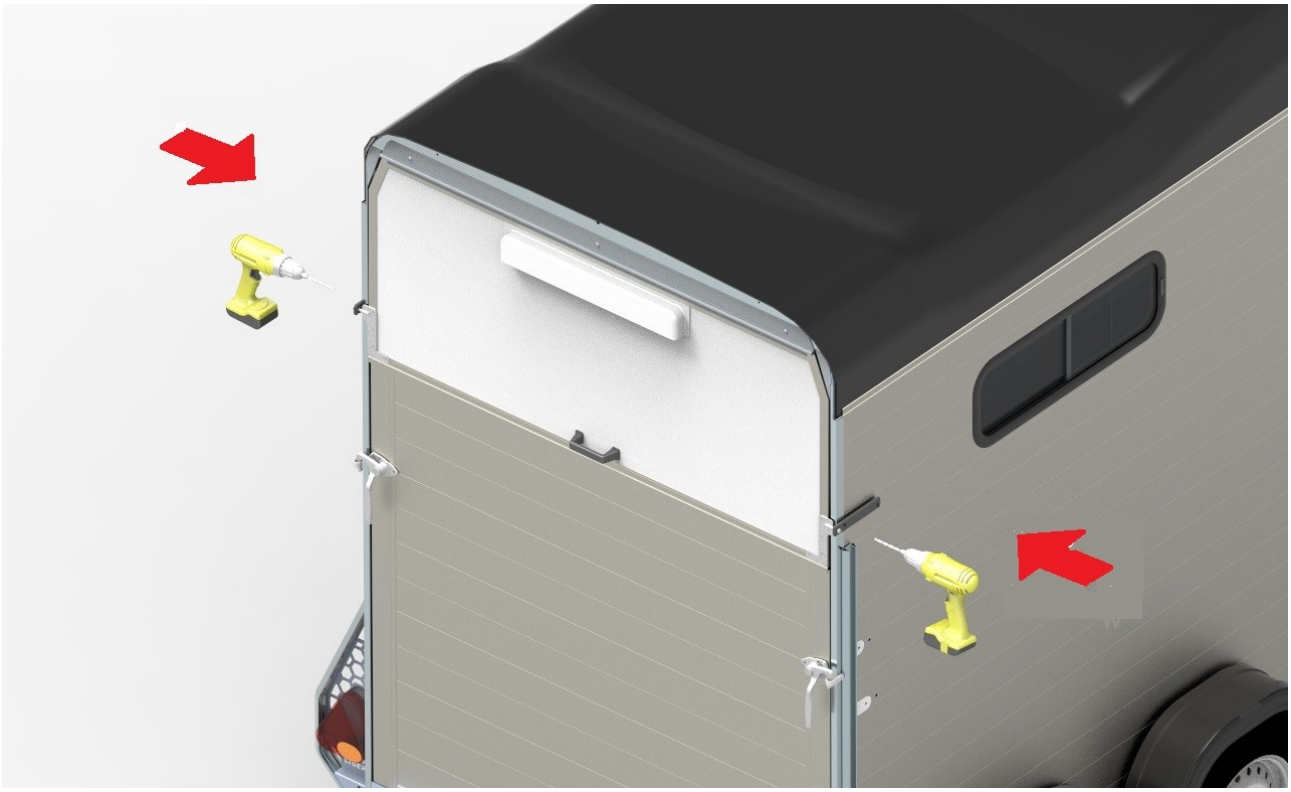


NUMBER	PICTURE	PCS
6		2

STEP 3

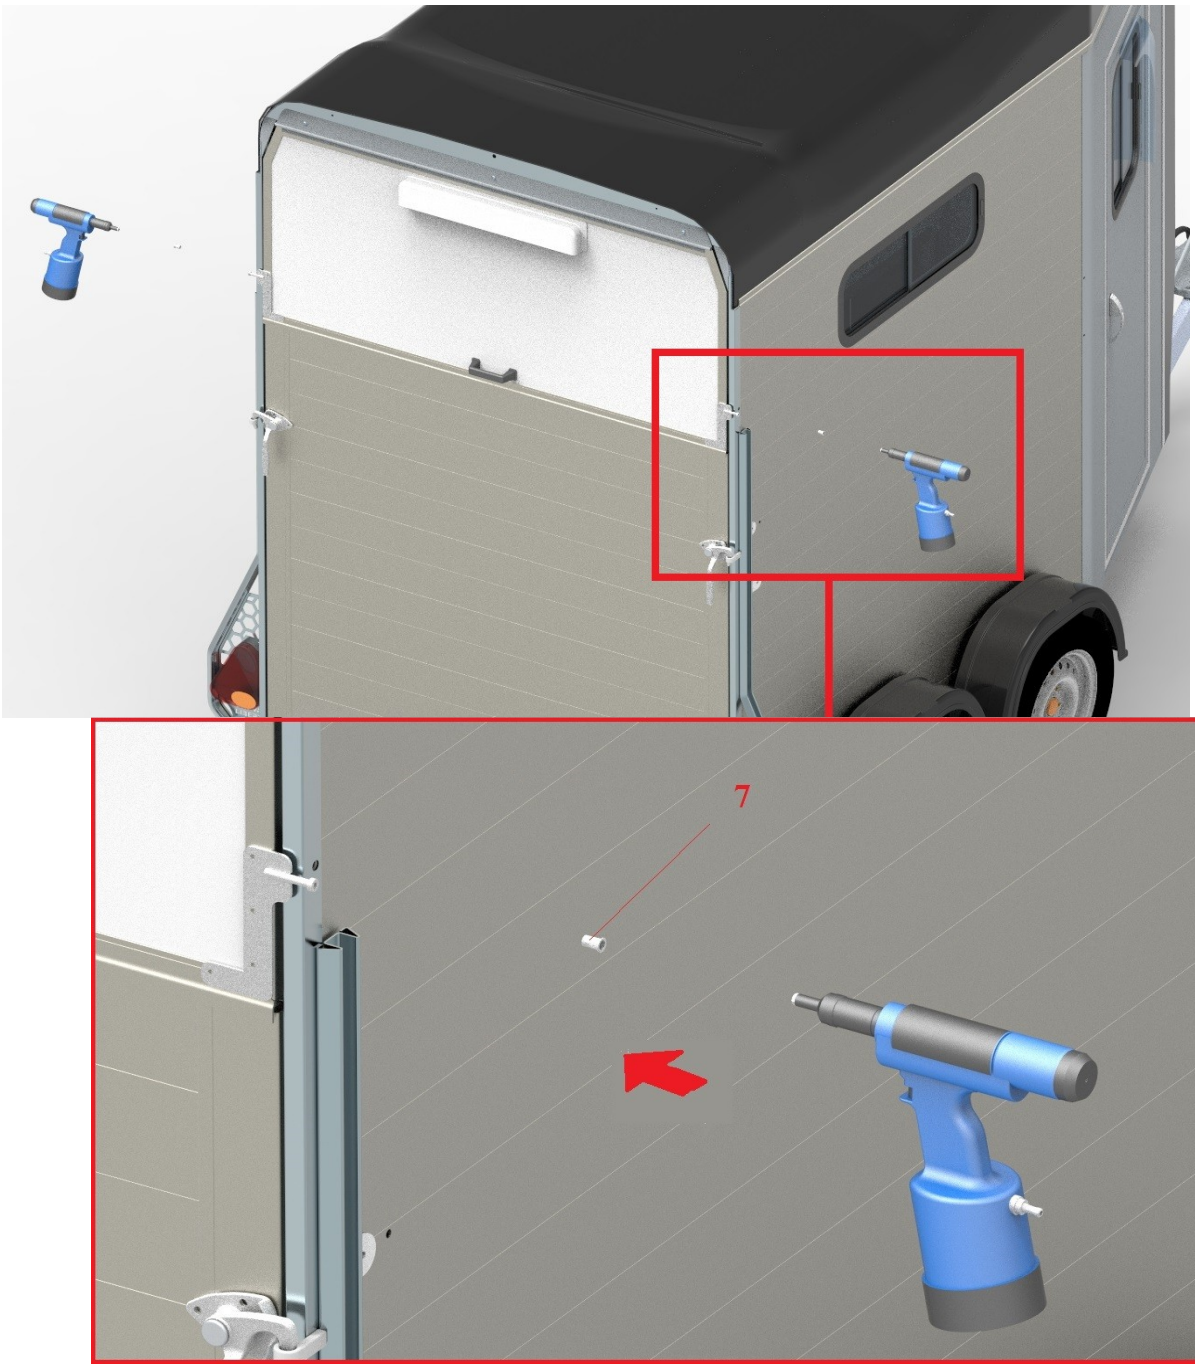

NUMBER	PICTURE	PCS
7		2

STEP 4

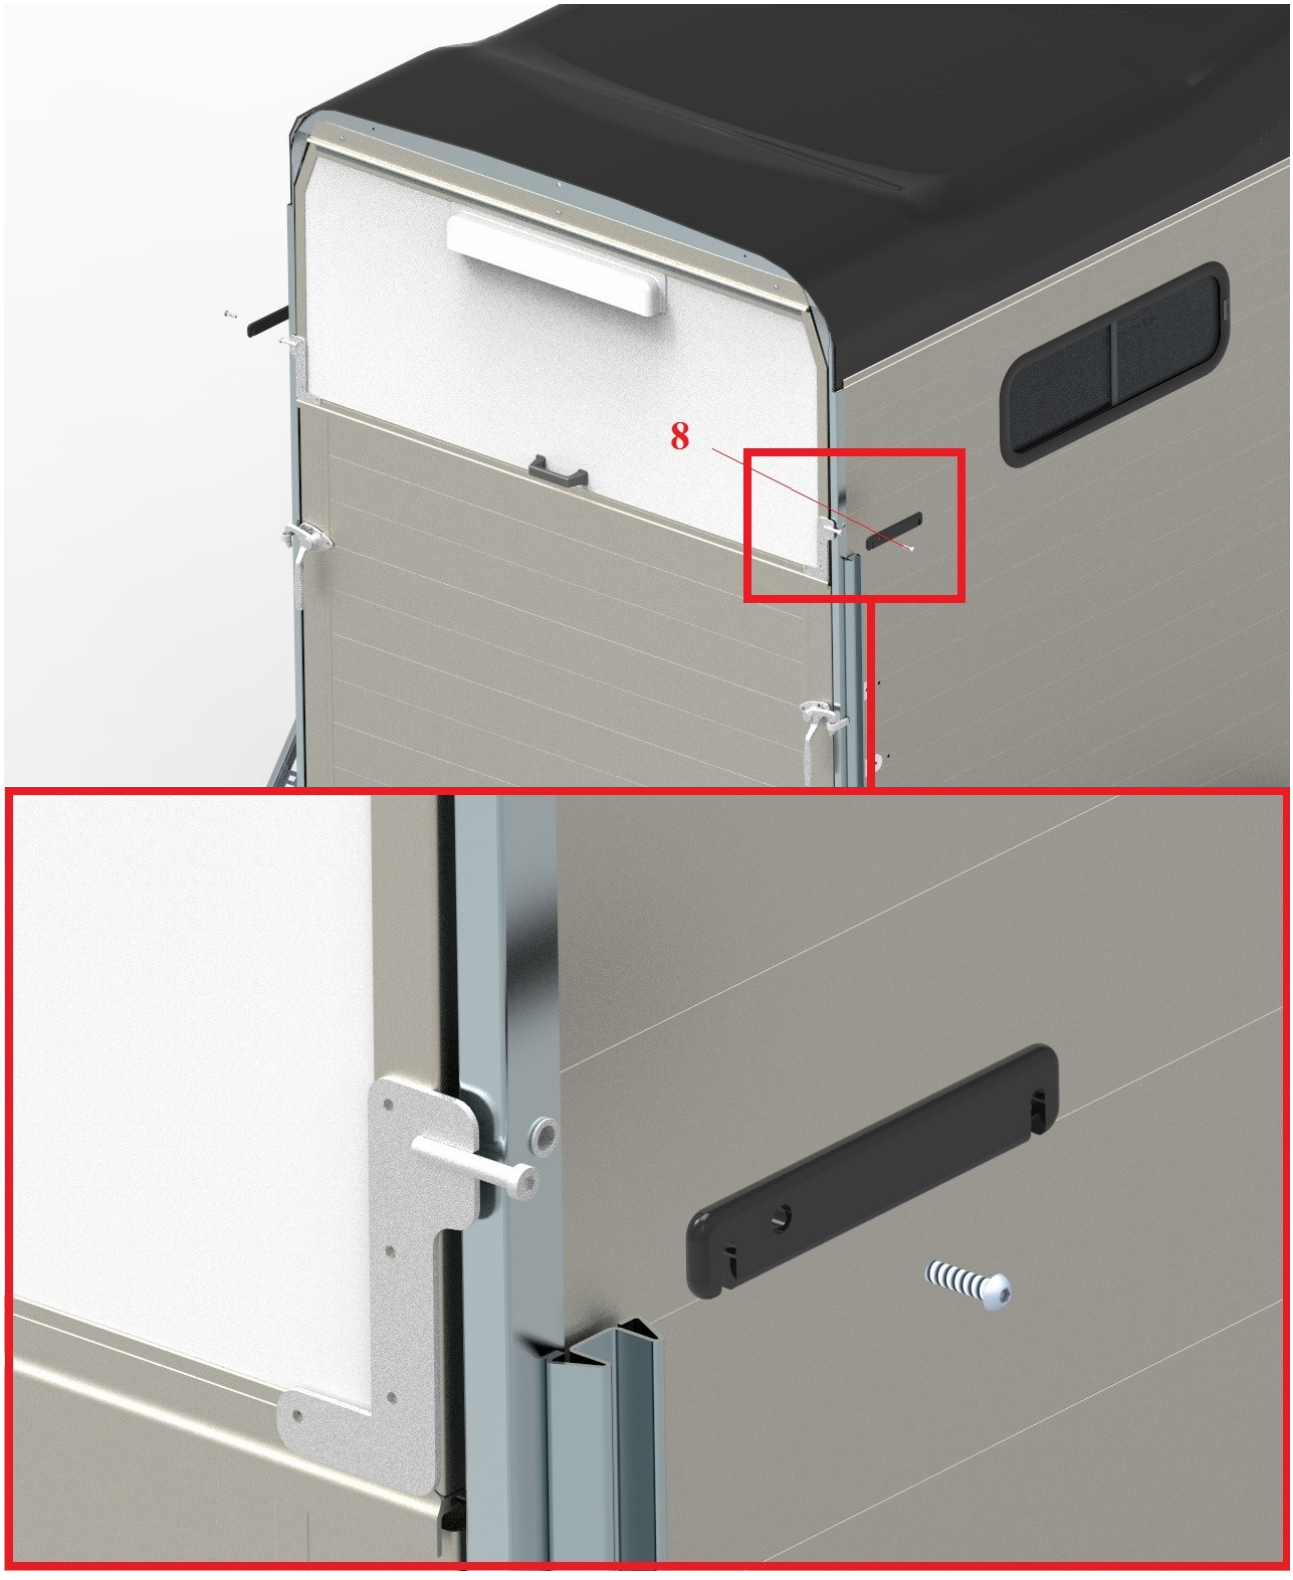

NUMBER	PICTURE	PCS
8	 8x30mm	2

CORRECT INSTALLATION



To installation you need:

- Wrench 4mm, 6mm



- Wrench 10mm, 13mm



- Driller



- Drill 6mm, 11mm



- Riveter to river nuts

